

# i-Top




## TCP/IP Smart Video Intercom For Apartment




## Function

Cat5/6

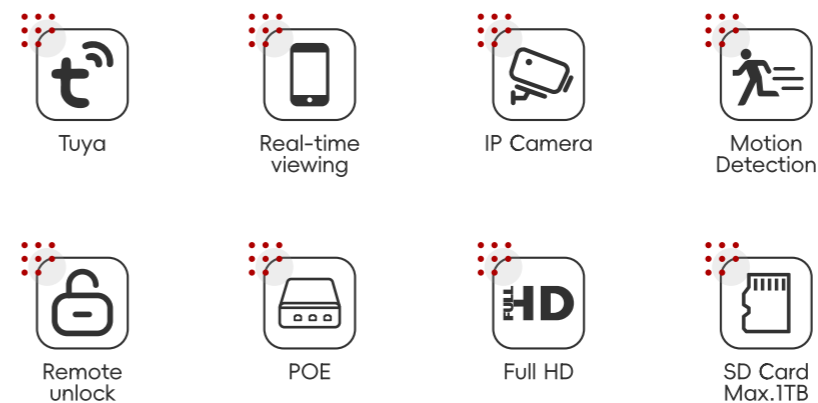


### Support to connect

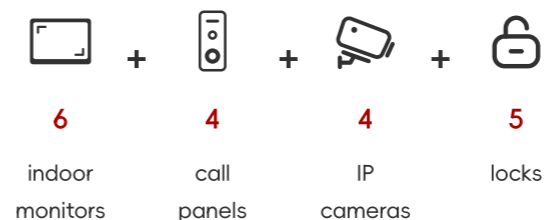

- \* Access video wherever the network reaches, giving your video surveillance power, connection, and control with a single Cat5/6 cable.
- \* Caution ! Please DO NOT use non-standard PoE switches.
- \* Up to 150 meters from door station to the last monitor.
- \* Up to 240 units in one system(For Apartment)

## System Diagram

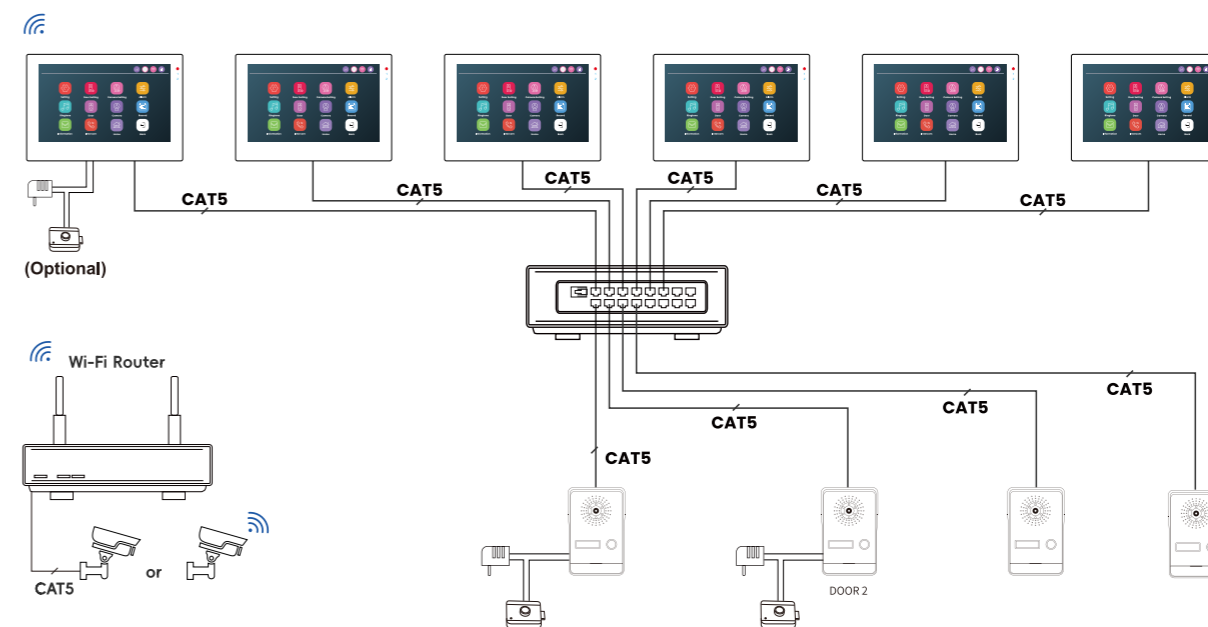

# i-Bus





## Digital 2-Wire Smart Video Intercom With AI Human Detection




## Function

2 Wire

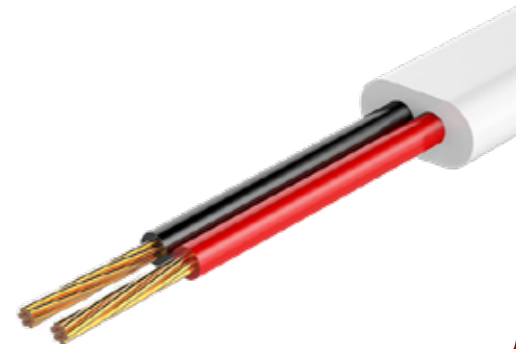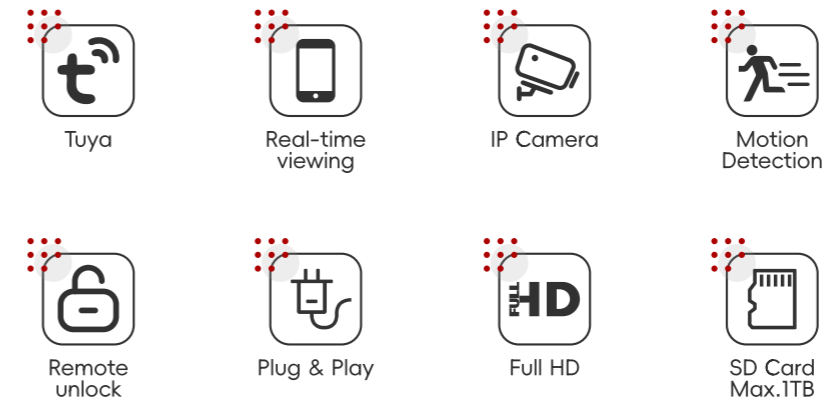


### Support to connect

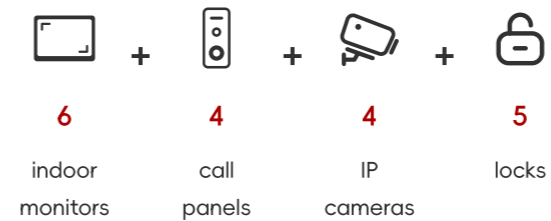

- \* It is connected to the door intercom system via 2-wire IP full-duplex technology and become indispensable in your everyday life.
- \* The Digital 2-wire non-polarity connection method significantly simplifies the device's wiring process, eliminating the need to distinguish between positive and negative poles, effectively reducing the installation error rate.
- \* Equipped with advanced H.265 video compression technology, it significantly enhances storage efficiency and reduces video storage costs.

## System Diagram

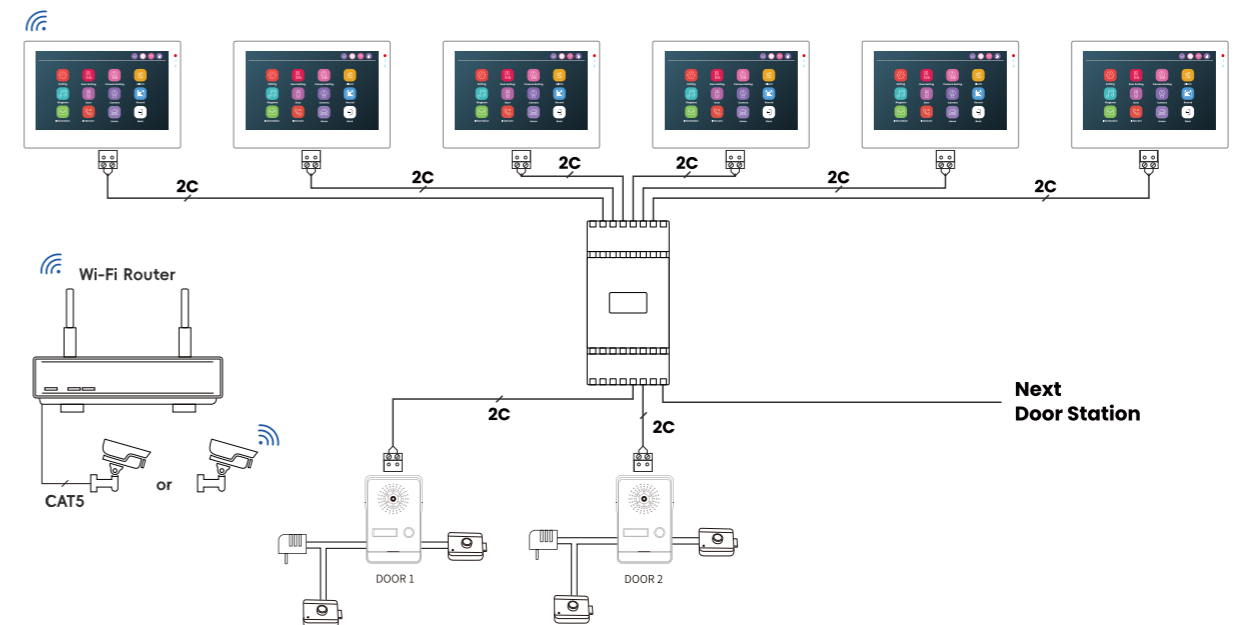

# i-Door



## IP Smart Doorbell



Works with Amazon Alexa

Works with Google Assistant



## Function

Cat5/6

- Tuya
- Real-time viewing
- Wide Angle (148°)
- Motion Detection
- Remote unlock
- Door Chime
- Full HD
- SD Card Max.128GB

Support to connect

- 2.4G Wi-Fi
- Android
- iOS



## System Diagram



# Product List

## Flexible collocation

A visitor rings the bell. A pleasant melody is heard inside the accommodation. The video door entry unit lets your visitor's face appear live. As you approach the monitor, you can speak with him and, if you wish, open your electric gate or electric gate to invite him to enter. In your absence, it records a photo of your visitors automatically on your video door entry unit so that you can view them when you return.

03



Product  
Variety



# Indoor monitor

It is used to receive and display video and audio signals from the video doorbell, enabling users to interact with visitors more conveniently and monitor the situation in front of the door.

## Customization



Design



Software



Hardware



Language



UI Layout



Logo Printing



Material



Solution



OEM Boxes

## 15.6 IPS Screen

Touch screen



Color :

Display	15.6-inch
Resolution	1920*1080
Dimension	385.5*248*23.5mm
Material	Aluminum Alloy
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support: i-DVR

## 11.6 IPS Screen

Touch screen



Color :

Display	11.6-inch
Resolution	1920*1080
Dimension	289*187*24.5mm
Material	Aluminum Alloy
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support: i-DVR

## 112 IPS Screen Touch screen



Display	10.1-inch
Resolution	1024*600
Dimension	249*181.5*22.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus / i-Smart / i-Honor

Color :

## 108 IPS Screen Touch screen



Display	10.1-inch
Resolution	1024*600
Dimension	248*152*19mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus / i-Smart / i-Honor

Color :

## 111 IPS Screen Touch screen



Display	10.1-inch
Resolution	1024*600
Dimension	249*181.5*22.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus / i-Smart / i-Honor

Color :

## 104 IPS Screen Touch screen



Display	10.1-inch
Resolution	1024*600
Dimension	274*185*24mm
Material	Aluminum Alloy
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor

Color :

## 110 IPS Screen Touch button



Display	10.1-inch
Resolution	1024*600
Dimension	249*181.5*23mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor

Color :

## 103 IPS Screen Touch screen




Display	10.1-inch
Resolution	1024*600
Dimension	272.5*182*24mm
Material	Aluminum Alloy
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus / i-Smart / i-Honor

Color :

# 716 IPS Screen Touch screen




Display	9-inch
Resolution	1024*600
Dimension	224*164*24.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus / i-Smart / i-Honor

Color :

# 743 IPS Screen Touch screen




Display	7-inch
Resolution	1024*600
Dimension	174*130*20.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus / i-Smart / i-Honor

Color :

# 749 IPS Screen Touch screen




Display	7-inch
Resolution	1024*600
Dimension	174*130*20.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus / i-Smart / i-Honor

Color :

# 742 IPS Screen Touch button





Display	7-inch
Resolution	1024*600
Dimension	180*134.5*19.7mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor

Color :

# 745 IPS Screen Touch screen

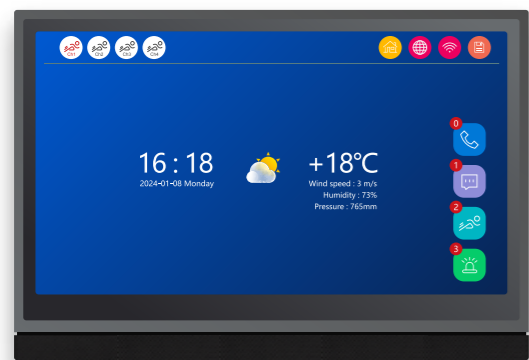


Display	7-inch
Resolution	1024*600
Dimension	224*164*24.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus / i-Smart / i-Honor

Color :

# 741 IPS Screen Touch screen



Display	7-inch
Resolution	1024*600
Dimension	179*128.5*21mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Bus / i-Smart / i-Honor

Color :

## 736 IPS Screen IPS Screen(Optional)



Display	7-inch
Resolution	1024*600
Dimension	237.5*143*15.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor / i-Mix / i-Ease / i-Fix

Color :

## 715 IPS Screen Touch screen



Display	7-inch
Resolution	1024*600
Dimension	174.5*118*18mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor

Color :

## 732 IPS Screen Touch screen



Display	7-inch
Resolution	1024*600
Dimension	179*110*21mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus / i-Smart / i-Honor

Color :

## 712 IPS Screen IPS Screen(Optional)



Display	7-inch
Resolution	1024*600
Dimension	176.5*117*20mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor / i-Mix / i-Ease / i-Fix

Color :

## 717 IPS Screen IPS Screen(Optional)



Display	7-inch
Resolution	1024*600
Dimension	179*134*16.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor / i-Mix / i-Ease / i-Fix

Color :

## 711 IPS Screen IPS Screen(Optional)



Display	7-inch
Resolution	1024*600
Dimension	246.5*120.5*20mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Ease

Color :

## 710 IPS Screen IPS Screen(Optional)



Display	7-inch
Resolution	1024*600
Dimension	176*123*21mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor / i-Mix

Color :

## 705 IPS Screen IPS Screen(Optional)



Display	7-inch
Resolution	1024*600
Dimension	206*117*21mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Honor / i-Mix / i-Ease / i-Fix

Color :

## 709 IPS Screen Touch button



Display	7-inch
Resolution	1024*600
Dimension	184*126*19mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor

Color :

## 703 IPS Screen Touch screen



Display	7-inch
Resolution	1024*600
Dimension	184*126*22.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus / i-Smart / i-Honor

Color :

## 708 IPS Screen IPS Screen(Optional)



Display	7-inch
Resolution	1024*600
Dimension	184*126*22.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor / i-Mix

Color :

## 701 IPS Screen IPS Screen(Optional)



Display	7-inch
Resolution	1024*600
Dimension	226*151*23.5mm
Material	Aluminum Alloy
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Smart / i-Honor / i-Mix

Color :

## 406 IPS Screen Touch screen



Display	4.3-inch
Resolution	480*272
Dimension	118*89.5*23mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	2-Wire / 4-Wire / Cat5 or Cat6
Memory slot	Micro SD card

System support:  
i-Top / i-Bus

Color :

## 403 IPS Screen Touch Button



Display	4.3-inch
Resolution	480*272
Dimension	170.5*112*15mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Mix / i-Ease / i-Fix

Color :

## 405 IPS Screen Manual Button



Display	4.3-inch
Resolution	480*272
Dimension	175.5*118*15mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Ease / i-Fix

Color :

## 402 IPS Screen Manual Button



Display	4.3-inch
Resolution	480*272
Dimension	170*122*21.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Mix / i-Ease / i-Fix

Color :

## 404 IPS Screen Touch Button



Display	4.3-inch
Resolution	480*272
Dimension	175.5*118*14.5mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Mix / i-Ease / i-Fix

Color :

## 401 TFT Screen Sensor Button



Display	4.3-inch
Resolution	480*272
Dimension	168.5*118.5*22.3mm
Material	ABS plastic
Working Temperature	-10°C to + 50°C
Installation	Surface mounting
Connection	4-Wire
Memory slot	Micro SD card

System support:  
i-Mix

Color :



## Customization

# Outdoor Call Station

More than just a door intercom.

Inspired by you, created by us.

Improving lives. Every day. Everywhere.

Connecting lives. Protecting life.



Design




Software



Hardware



Logo Printing




Material



Solution



OEM Boxes



### 241

System support:


- i-Top
- i-Bus



### 238

System support:

- i-Top
- i-Bus
- i-Smart
- i-Honor



### 236-E

System support:


- i-Top
- i-Bus
- i-Smart
- i-Honor



### 236-S

System support:


- i-Top
- i-Bus
- i-Smart
- i-Honor



### 226

System support:

- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



### 224/ 224IC

System support:

- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



### 221-K

System support:

- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



### 223-C

System support:

- i-Top
- i-Bus
- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



### 208/ 208IC

System support:

- i-Top
- i-Bus
- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



### 202B 202IC

System support:

- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



### 221-A

System support:

- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



### 206/ 206IC

System support:

- i-Top
- i-Busi-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



### 221-E

System support:

- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



### 201

System support:

- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



# Call Panel



Password Door Station



Equipped with an IC card password unlock feature the capacity is 200pcs



## 214

System support:

- i-Top
- i-Bus
- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



## 236

System support:

- i-Top
- i-Bus
- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



## 220-N

System support:

- i-Top
- i-Bus
- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



## 221-B

System support:

- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix





Equipped with fingerprint unlock feature  
the capacity is 100pcs

# Call Panel

Fingerprint Door Station



## 202F

System support:  
i-Smart  
i-Honor  
i-Mix  
i-Ease  
i-Fix



## 220-F

System support:  
i-Top  
i-Bus  
i-Smart  
i-Honor



## 235/235IC

System support:  
i-Smart  
i-Honor

NEW



## 236-T

System support:  
i-Top  
i-Bus  
i-Smart  
i-Honor

NEW



## 218

System support:  
i-Top  
i-Bus  
i-Smart  
i-Honor





# Call Panel

1-4 User Door Station

2MP HD smart IR camera


Angle of view: 148°



## 219-1/2/3/4

System support:


- i-Top
- i-Bus
- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



## 220-1/2/3/4

System support:

- i-Top
- i-Bus
- i-Smart
- i-Honor



## 220-A-1 220-A-2

System support:

- i-Top
- i-Bus
- i-Smart
- i-Honor






# Call Panel



1-4 User Door Station


Name Plate on owner's apartment  
RFID card for access



## 220IC-1/2/3/4

System support:


- i-Top
- i-Bus
- i-Smart
- i-Honor



## 223-E-1/2

System support:

- i-Top
- i-Bus
- i-Smart
- i-Honor



## 229IC-1/2/3/4

System support:


- i-Top
- i-Bus
- i-Smart
- i-Honor
- i-Mix
- i-Ease
- i-Fix



# Call Panel




Direct-pressure door phone is simple and elegant



## 241

System support:  
i-Top  
i-Bus



## 313V

System support:  
i-Top  
i-Bus



Call Panel




# Audio Doorbell


Able to work with 36 Units  
With unlock function



☐  
☐☐☐ 313-K



☐☐☐ 313



☐☐☐ 313-ID



# Handset


Work with the  
313 Audio Doorbell

☐☐☐ 92311



# Analog Apartment System

Extension

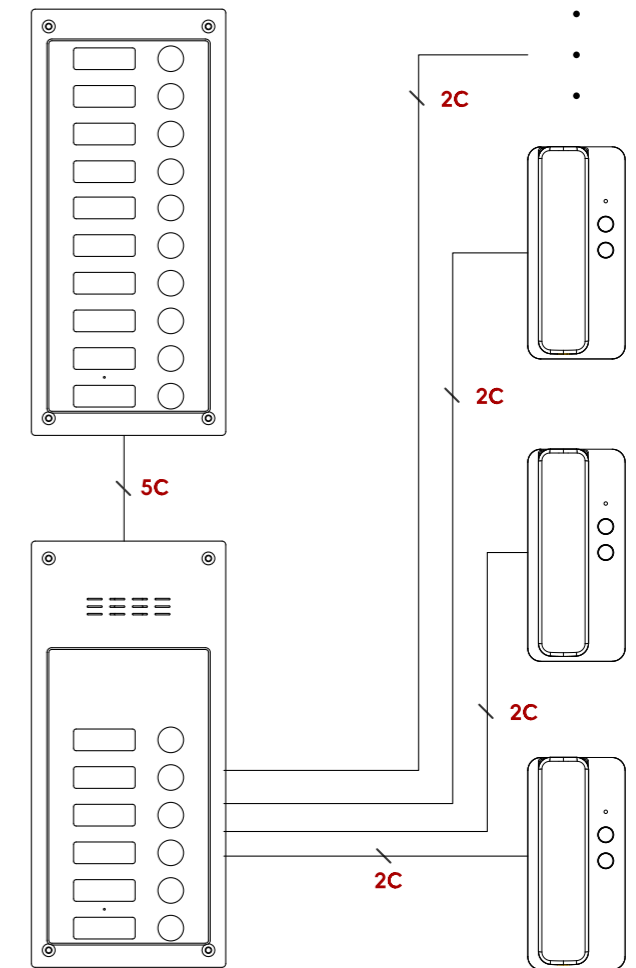

# Audio Doorbell

Equipped with advanced unlock functions for seamless access control, enhancing security and convenience.

Indoor unit able to connect 1 slave unit



# Handset

90119



# IP Apartment system

Extension

